

1U LTO Rackmount Tape Drive with USB interface and SAS interface fitting in standard rackmount




Function

- USB3.0 interface model enable plug & play operation (USB-RM model)
 - Enable easy connection to a standard USB port without inserting an extension card
- High speed SAS interface model (SAS-RM model)
- UNITEX LTFS3000 software / LTFS GUI utility are included
- Support Mac, Windows, Linux



Example of use

- Build a backup environment with the private cloud at the data center.
- Countermeasure for disaster

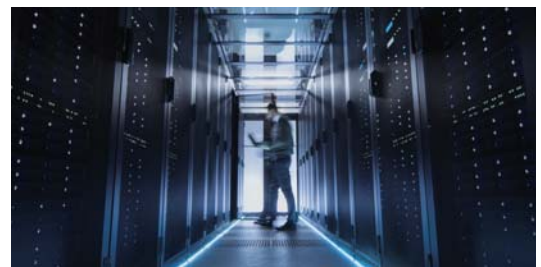


Features

- Install in the same rack as the operation server to manage easily
- Load maximum 2 drives in 19 inch rack 1U
- Large capacity 12TB Ultrium8 data cartridge (LT80H USB-RM/LT80 SAS-RM model)
- Support various backup software
 - UNITEX Tarbackup
 - arcserve backup
 - Acronis Backup Advanced for Windows Server
 - Quest NetVault Backup
 - Veritus Backup Exec

LT80 / LT70 / LT60 / LT50 RM

Example of use of 1U LTO Rackmount Tape Drive

Data archive/backup from a server, etc

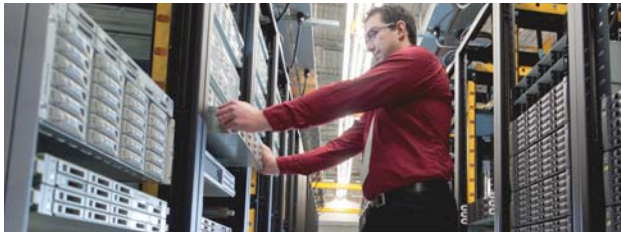

- Build a backup environment with the private cloud at Data center
- Build a D2D2T backup environment per client at Data center
- Countermeasure for disaster

Rear of USB-RM model



Rear of SAS-RM model



1U USB LTO Rackmount model

LT80H / 70H / 60H / 50H USB-RM Tape Drive

Model	LT80H USB-RM1	LT80H USB-RM2	LT70H USB-RM1	LT70H USB-RM2	LT60H USB-RM1	LT60H USB-RM2	LT50H USB-RM1	LT50H USB-RM2
Drive Type	LTO-8 Tape Drive		LTO-7 Tape Drive		LTO-6 Tape Drive		LTO-5 Tape Drive	
Number of Drive	1	2	1	2	1	2	1	2
Cartridge type	LTO-8 Data cartridge		LTO-7 Data cartridge		LTO-6 Data cartridge		LTO-5 Data cartridge	
Capacity	30.0TB (2.5:1 Compression) / 12.0TB (Native)		15.0TB (2.5:1 Compression) / 6.0TB (Native)		6.25TB (2.5:1 Compression) / 2.5TB (Native)		3.0TB (2:1 Compression) / 1.5TB (Native)	
Interface	USB3.0							
Max. data transfer (Native)	240MB/sec				160MB/sec		140MB/sec	
Support OS	Mac / Windows / Linux							
Dimensions (mm)	426.6(W) x 409.8(D) x 44(H)							
Power consumption	70VA	90VA	70VA	90VA	70VA	90VA	70VA	90VA
Weight	6.7kg	8.4kg	6.7kg	8.4kg	6.7kg	8.4kg	6.7kg	8.4kg
Power supply	AC 100-240V, 50-60Hz (Automatic range setting)							

1U SAS LTO Rackmount model

LT80 / 70 / 60 / 50 SAS-RM Tape Drive

Model	LT80 SAS-RM1	LT80 SAS-RM2	LT70 SAS-RM1	LT70 SAS-RM2	LT60 SAS-RM1	LT60 SAS-RM2	LT50 SAS-RM1	LT50 SAS-RM2
Drive Type	LTO-8 Tape Drive		LTO-7 Tape Drive		LTO-6 Tape Drive		LTO-5 Tape Drive	
Number of Drive	1	2	1	2	1	2	1	2
Cartridge type	LTO-8 Data cartridge		LTO-7 Data cartridge		LTO-6 Data cartridge		LTO-5 Data cartridge	
Capacity	30.0TB (2.5:1 Compression) / 12.0TB (Native)		15.0TB (2.5:1 Compression) / 6.0TB (Native)		6.25TB (2.5:1 Compression) / 2.5TB (Native)		3.0TB (2:1 Compression) / 1.5TB (Native)	
Interface	miniSAS(SFF-8088)							
Max. data transfer (Native)	300MB/sec				160MB/sec		140MB/sec	
Support OS	Mac / Windows / Linux							
Dimensions (mm)	426.6(W) x 409.8(D) x 44(H)							
Power consumption	70VA	90VA	70VA	90VA	70VA	90VA	70VA	90VA
Weight	6.7kg	8.4kg	6.7kg	8.4kg	6.7kg	8.4kg	6.7kg	8.4kg
Power supply	AC 100-240V, 50-60Hz (Automatic range setting)							

LTO data copy software



UNITEX FASTapeLT

Enables copy & verify of multiple data to max. 4 media simultaneously such as LTO to 2xLTO and 2xHDD, etc

LTO Archive software



UNITEX ArchiveLT

Archive software enable high speed archive & retrieve, data management with metadata, offline search, etc

Backup software



UNITEX TarBackup

Useful software to read Magnetic tapes/files created with Linux/UNIX tar format on window OS. Enables creation of tar format's magnetic tapes/files which can be read on Linux/UNIX OS.



Support various backup software

Acronis Backup, Arcserve backup, Veritas Backup Exec, Quest NetVault Backup, etc.

* Company names, product names, software names are either trade marks or registered trademarks of respective companies.

* Specifications are subject to change without notice.

DOC-LTRN1-AD 19050001