
## NB1U-EC242D4S 1U Rack-mount Server

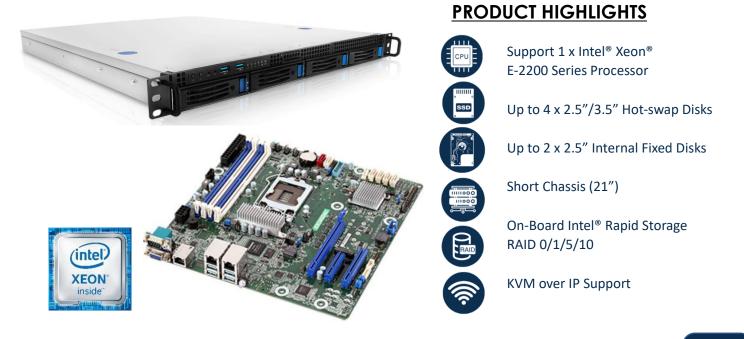

Form Factor	537.55 x 430 x 43.3 mm (21.16" x 16.93" x 1.70")
Processor	(1) Intel® Xeon® E-2200 Series Processor
Chipset	Intel <sup>®</sup> C242 chipset
Memory	(4) DDR4 2666/2400/2133/1866 ECC UDIMM slots
Storage	(4) 2.5"/3.5" Hot-swap disk bays
	(2) 2.5" fixed disk bays
SATA Controller	Intel <sup>®</sup> C242: 6 x SATA3 6.0Gb/s; support RAID 0, 1, 5, 10
Expansion Slots	(1) PCIe 3.0 x8
Network	(2) Intel® i210 1GbE RJ45 port
	(1) Realtek RTL8211E 1GbE RJ45 Dedicated port for Management
Integrated Graphics	Aspeed AST2500 32MB DDR4 VRAM
Rear I/O	(2) USB 3.1 Ports
	(2) USB 3.0 Ports
	(1) VGA Port
	(2) 1GbE RJ45 Ports
	(1) 1GbE RJ45 Port (Management)
	(1) Serial Port
Front I/O	(2) USB 2.0 Ports
Power Supply	(1) Fixed 500W 80Plus Gold PSU or (1) Fixed 200W Flex PSU
Server Management	IPMI v2.0 compliant, on board "KVM over IP" support
Environment	Operating temperature: 10°C ~ 35°C / Non-operating temperature:- 40°C ~ 70°C

## Serveron Sdn Bhd

Unit C-6-15, Block C, Southgate Commercial Complex, No. 2, Jalan Dua, Chan Sow Lin, 55200 Kuala Lumpur, Malaysia Main: 1-700-81-7837 Fax: +603-9226-0771

Email: sales@serveron.com.my For more information, please visit www.serveron.com.my

© 2023 Serveron Sdn Bhd. All rights reserved. Serveron shall not be liable for technical or editorial errors or omissions contained herein. Serveron makes no representation or warranty regarding third-party products or services. The information contained herein is subject to change without notice. Nothing herein should be construed as constituting an additional warranty. Intel, the Intel logo, Xeon, Xeon Inside, Core i7 Inside, Core i5 Inside, and Core i3 Inside are trademarks or registered trademarks of Intel Corporation in the U.S. and/or other countries. Other company, product, and service names may be trademarks or service marks of others.